

## PROTECTION MADE SIMPLE.

# HighPROTEC

## MCA4

**FEEDER PROTECTION AND INTERCONNECTION OF  
DECENTRALIZED ENERGY RESOURCES**

The MCA4 is a complete solution for the connection of decentralized power generation systems, e. g. wind power, photovoltaic, biogas, to the grid. The MCA4 protects your systems and guarantees the grid compliance of the connected power generation system. It offers high measurement precision and high reliability, and all functions for protection, control and monitoring are included in the price of the device ("all-inclusive concept").

The quality of our HighPROTEC devices, has been certified by the KEMA after passing all tests specified by the IEC 60255-1:2009.

In addition, another independent institute certified the grid-compliant features of the MCA4 (full compliance with VDE-AR-N 4110, certified by the TÜV Nord). Besides, the MCA4 can be perfectly used for feeder protection, grid decoupling and as a generator backup protection.



### New Features – Release 3.7

- ▶ VDE-AR-N 4110; VDE-AR-N 4120
- ▶ G99 Issue 1 Amendment 6
- ▶ Improved frequency and ROCOF precision
- ▶ Improved design of the PC tools
- ▶ Configurable SCADA protocols: Modbus, Profibus, IEC 60870-5-103/-104, DNP3

*All HighPROTEC devices have been type tested and fully certified by KEMA Laboratories (IEC 60255-1:2009).*

### Comprehensive Protection Package <sup>(1)</sup>

- ▶ 6 elements phase overcurrent protection directional and non-directional (ANSI/IEC/51C/51V)
- ▶ Frequency measurement and ROCOF (df/dt) measurement is now user-adjustable. Furthermore, measurement precision has been improved: 5 mHz from 45-55 Hz
- ▶ 4 elements earth fault protection <sup>(2)</sup>, non-directional or directional (multi-polarising)
- ▶ Wattmetric Ground Fault Protection
- ▶ 2 elements unbalanced load protection
- ▶ Voltage protection <sup>(2)</sup>  
6 elements selectable:  $V<$ ,  $V>$ ,  $V<(t)$
- ▶ 6 elements unbalanced voltage supervision
- ▶ Fourth Voltage measuring input <sup>(2)</sup>  
2 elements  $VE>$  or  $VX$  (for synchro-check)
- ▶ Synchro-check options: Generator-to-System or System-to-System
- ▶ 6 elements frequency protection; each can be used as:  $f>$ ,  $f<$ , df/dt (ROCOF), vector surge
- ▶ 6 elements power protection; each can be used as:  $P>$ ,  $P<$ ,  $Pr$ ,  $Q>$ ,  $Q<$ ,  $Qr$ ,  $S>$ ,  $S<$  Two elements power factor (PF)

### Power Quality

- ▶ THD protection

### Demand Management/ peak values

- ▶ Peak values of current and power, average current and energy demand

### Interconnection Package

The comprehensive interconnection package is summarized within one menu:

- ▶ Non-discriminating active power direction depending load shedding
- ▶ HVRT (High Voltage Ride Through)
- ▶ FRT (LVRT): Settable FRT-Profiles, optional AR coordinated
- ▶ QV-Protection: Undervoltage-Reactive
- ▶ Power protection
- ▶ Automatic Reconnection
- ▶ Frequency protection: 6 elements configurable as  $f<$ ,  $f>$ , df/dt (ROCOF), vector surge
- ▶ CB-Intertripping
- ▶ Synchro-check (Generator to mains, mains-to-mains), options e.g. to switch onto dead bus

### Recorders

- ▶ Disturbance recorder: 120 s non volatile
- ▶ Fault recorder: 20 faults
- ▶ Event recorder: 300 events
- ▶ Trend recorder: 4000 non volatile entries

### PC Tools

- ▶ Setting and analyzing software  
Smart view for free
- ▶ Including page editor to design own Control pages
- ▶ SCADApter to re-assign datapoints for Retrofit projects: Modbus, Profibus, IEC 60870-5-103/-104

### Control

- ▶ up to six breakers (or isolators/grounding switches)
- ▶ Breaker wear

### Time Synchronisation

- ▶ SNTP, IRIG-B00X, Modbus, DNP 3.0, IEC 60870-5-103/-104

### Commissioning Support

- ▶ USB connection
- ▶ Customizable Display (Single-Line)
- ▶ Customizable Inserts
- ▶ Copy and compare parameter sets
- ▶ Configuration files are convertible
- ▶ Forcing and disarming of output relays
- ▶ Fault simulator: current, voltage
- ▶ Graphical display of tripping characteristics
- ▶ 8 languages selectable within the relay

### Communication Options

- ▶ IEC 61850
- ▶ Profibus DP
- ▶ Modbus RTU and/or Modbus TCP
- ▶ IEC 60870-5-103
- ▶ IEC 60870-5-104
- ▶ DNP 3.0 (RTU, TCP, UDP)
- ▶ SCADApter

### Cyber Security

- ▶ Menu for the activation of BDEW-Whitepaper-compliant security settings (e. g. hardening of interfaces)
- ▶ Security Logger
- ▶ Centralized Security Logs (Syslog)
- ▶ Encrypted Connection Smart view – Device
- ▶ Device specific certificates (No man in the middle attacks)

### Logic

- ▶ Up to 80 logic equations for protection, control and monitoring


<sup>(1)</sup> DFT, True RMS or I2 based

<sup>(2)</sup> DFT or True RMS based

### Functional overview

Protective Functions		ANSI	IEC 61850
I, time overcurrent and short circuit protection, all elements can be configured for directional or non-directional supervision. Multiple reset options (instantaneous, definite time, reset characteristics according to IEC and ANSI). Voltage controlled overcurrent protection by means of adaptive parameters Voltage restrained overcurrent protection Negative phase sequence overcurrent protection	6	50P, 51P, 67P  51C 51V 51Q	PTOC
I2>, unbalanced load protection with evaluation of the negative phase sequence currents	2	46	PTOC
IB, overload protection with thermal replica and separate pick-up values for alarm and trip functions	1	49	PTTR
IH2/In, inrush detection with evaluation of the 2nd harmonic	1	Inrush	PHAR
IG, earth overcurrent and short circuit protection, all elements can be configured for directional (multi-polarising) or non-directional supervision. Various reset options (instantaneous, definite time, reset characteristics according to IEC and ANSI).	4	50N/G, 51N/G, 67N/G	PTOC
V<, V>, V(t)<, under- and overvoltage protection, time dependent undervoltage protection	6	27, 59	PTOV, PTUV
Voltage asymmetry supervision (V012) V1, under and overvoltage in positive phase sequence system V2, overvoltage in negative phase sequence system	6	47	PTOV, PTUV
Each of the six frequency protection elements can be used as: f< fs, df, dt, ROCOF, DF/DT, vector surge, ...	6	81U/O, 81R, 78	PTOF, PTUF, PFRC, PPAM
VX, residual voltage protection or bus bar voltage for Synch Check	2	27A/N, 59A/N	PTOV, PTUV
AR, automatic reclosing	1	79	RREC
ExP, External alarm and trip functions	4		GAPC
PQS, Power protection	6	32, 37	PDOP, PDUP
PF, Power factor	2	55	PUPF
FRT (optional coordination with AR-feature)	27 (t)	27 (t, AR)	
HVRT (OVRT) High Voltage Ride Through	1	59	PTOV
Q(V) Protection (undervolt. dep. directional reactive power protection with reclosing disengaging)			PTUV
UFLS (non-discriminating active power direction depending load shedding)			PFRC
10-Minutes-Mean-Square-Sliding Supervision: adjustable according to VDE-AR 4105			
Synch Check		25	RSYN
Control and Logic			
Control: Position indication, supervision time management and interlockings for up to 6 breakers			CILO, CSWI, XCBR, XSWI
Logic: Up to 80 logic equations, each with 4 inputs, selectable logical gates, timers and memory function			
Supervision Functions			
CBF, circuit breaker failure protection	1	50BF	RBRF
TCS, trip circuit supervision	1	74TC	SCBR
LOP, loss of potential	1	60FL	
FF, fuse failure protection via digital input	1	60FL	
CTS, current transformer supervision	1	60L	
CLPU, cold load pickup	1		
SOTF, switch onto fault	1		PSOF
Demand management and peak value supervision (current and power)			
THD supervision			
Breaker wear with programmable wear curves			
Recorders: Disturbance recorder, fault recorder, event recorder, trend recorder			RDRE

## Functional overview in ANSI / IEEE C37.2 form

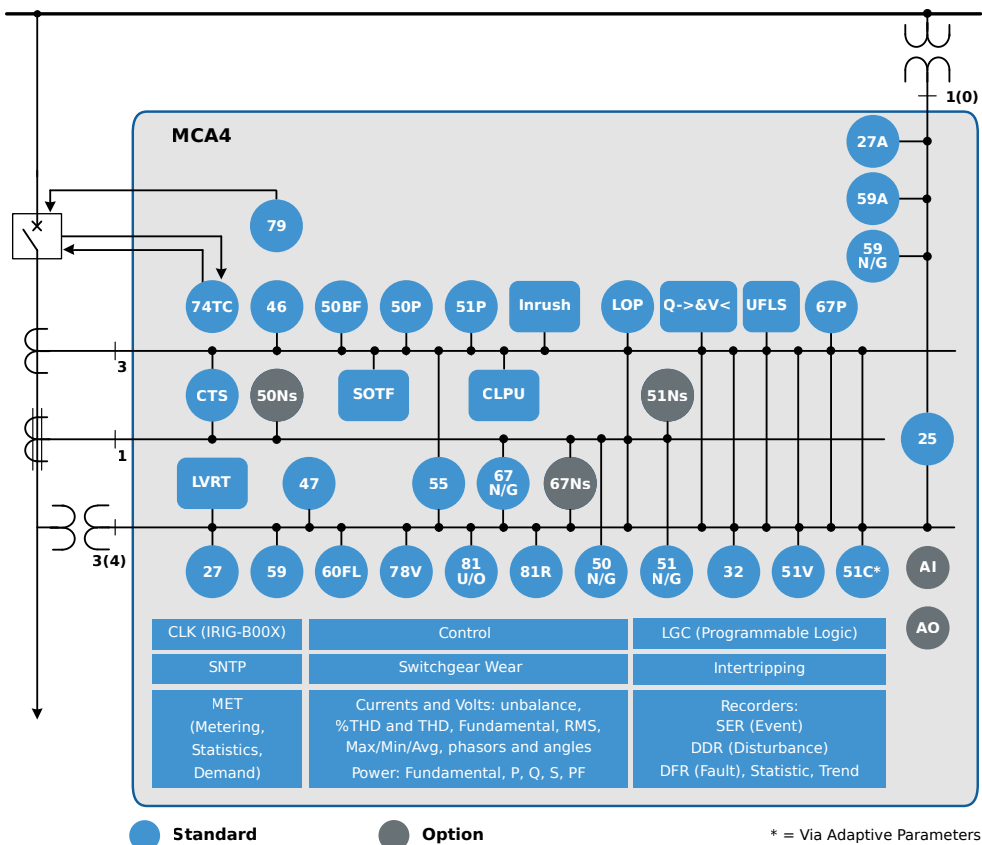


### 19 " Variants Available!

See Order Form on page 4,  
housing type "rack mounting"




<https://docs.SEGelectronics.de/hpt-2>

### Terminals Available Separately!



Order codes HPTTERMKIT-1 ... -5  
For MCA4: HPTTERMKIT-3  
The terminal kits allow for making  
all required wirings in advance,  
thus speeding up the installation  
and commissioning work.

## Connections (Example)

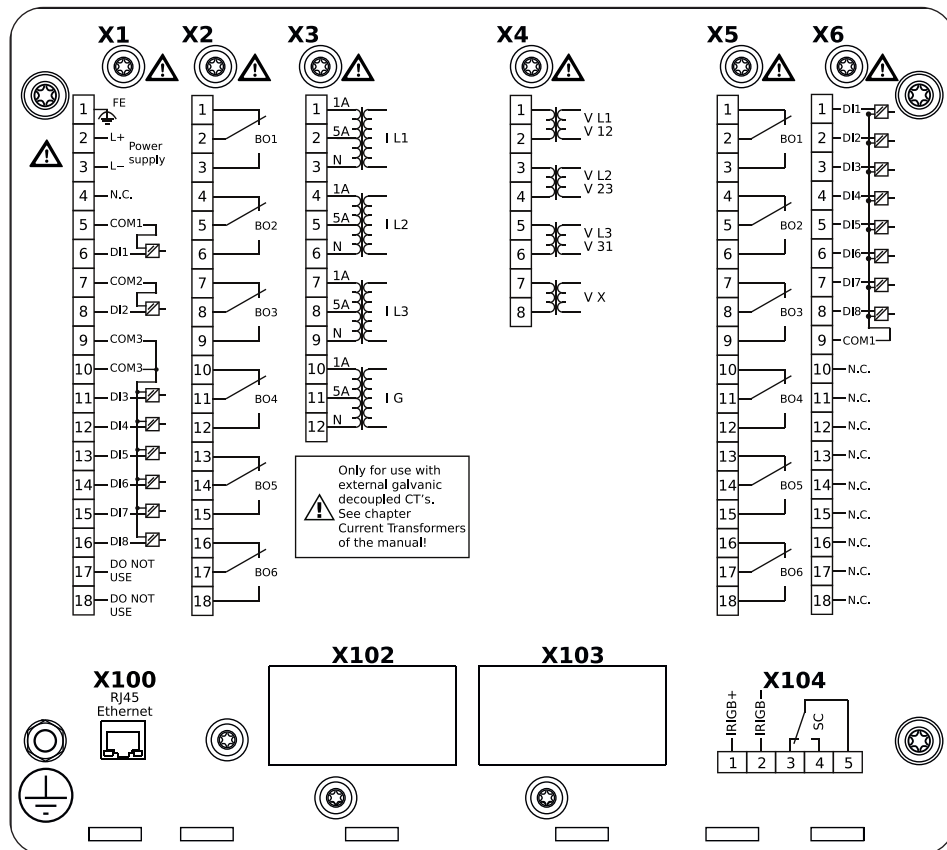

## Approvals / Standards



certified regarding UL508  
(Industrial Controls)

certified regarding  
CSA-C22.2 No. 14  
(Industrial Controls)

certified by EAC  
(Eurasian Conformity)

Type tested and certified by KEMA  
Laboratories in accordance with the  
complete type test requirements of  
IEC 60255-1:2009.

Component certificate regarding the  
German grid code standard  
VDE-AR-N 4110 (2018-11)  
Component certificate regarding the  
German grid code standard  
VDE-AR-N 4120 (2018-11)

Complies with G99 Issue 1 Am. 6.  
Complies with IEEE 1547-2003.  
Amended by IEEE 1547a-2014.  
Complies with ANSI C37.90-2005.

# PROTECTION MADE SIMPLE.

## Order Form MCA4

Feeder Protection and Interconnection of Decentralized Energy Resources					MCA4	-2				
Version 2 with USB, enhanced communication and user options										
Analog In	Digital	Binary	Housing	Large						
Analog Out	Inputs	output relays		display						
-	8	7	B2	X	A					
-	16	13	B2	X	D					
-	24	20	B2	X	E					
2+2	16	15	B2	X	F					
<b>Hardware variant 2</b>										
Phase Current 5 A/1 A, Ground Current 5 A/1 A						0				
Phase Current 5 A/1 A, Sensitive Ground Current 5 A/1 A						1				
<b>Housing and mounting</b>										
Housing suitable for door mounting							A			
Housing suitable for 19" rack mounting							B			
<b>Communication protocol</b>										
Without protocol							A*			
Modbus RTU, IEC 60870-5-103, DNP 3.0 RTU   RS485/terminals							B*			
Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Ethernet 100 MB/RJ45							C*			
Profibus-DP   optic fiber/ST-connector							D*			
Profibus-DP   RS485/D-SUB							E*			
Modbus RTU, IEC 60870-5-103, DNP 3.0 RTU   optic fiber/ST-connector							F*			
Modbus RTU, IEC 60870-5-103, DNP 3.0 RTU   RS485/D-SUB							G*			
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Ethernet 100MB/RJ45							H*			
IEC 60870-5-103, Modbus RTU, DNP 3.0 RTU   RS485/terminals							I*			
Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Ethernet 100 MB/RJ45										
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Optical Ethernet 100MB/LC du-							K*			
plex connector										
Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Optical Ethernet 100MB/LC duplex connector							L*			
IEC 60870-5-103, Modbus RTU, DNP 3.0 RTU   RS485/terminals										
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104   Ethernet 100 MB/RJ45							T*			
<b>Harsh Environment Option</b>										
None							A			
Conformal Coating							B			
<b>Available menu languages (in every device)</b>										
English / German / Spanish / Russian / Polish / Portuguese / French / Romanian										

\* Within every communication option only one communication protocol is usable.

Smart view can be used in parallel via the Ethernet interface (RJ45).

The parameterizing- and disturbance analyzing software Smart view can be used without extra costs.

Current inputs	4 (1 A and 5 A) with automatic CT Disconnect
Voltage inputs	4 (0 ... 800 V, for variants MCA4-2 <b>A</b> , MCA4-2 <b>D</b> , and MCA4-2 <b>F</b> ) or 4 (0 ... 300 V, for variant MCA4-2 <b>E</b> )
Digital Inputs	Switching thresholds adjustable via software
Analog inputs (Type F)	0 ... 20mA / 4 ... 20mA / 0 ... 10V
Analog outputs (Type F)	0 ... 20mA / 4 ... 20mA / 0 ... 10V
Power supply	Wide range power supply 24 VDC – 270 VDC / 48 VAC – 230 VAC (–20/+10%)
Terminals	All terminals plug type
Type of enclosure (Front)	IP54
Dimensions of housing (W x H x D)	19" flush mounting: 212.7 mm x 173 mm x 208 mm 8.374 in. x 6.811 in. x 8.189 in. Door mounting: 212.7 mm x 183 mm x 208 mm 8.374 in. x 7.205 in. x 8.189 in.
Weight (max. components)	approx. 4.2 kg / 9.259 lb

## Contact:

### SEG Electronics GmbH

Krefelder Weg 47  
47906 Kempen  
Germany

### Sales

Phone: +49 (0) 21 52 145 331  
Fax: +49 (0) 21 52 145 354  
E-Mail: sales@SEGelectronics.de

### Service & Support


Phone: +49 (0) 21 52 145 600  
Fax: +49 (0) 21 52 145 354  
E-Mail: support@SEGelectronics.de

### Find Your Local Distributor on

<http://www.SEGelectronics.de>

### Technical Documents:

<https://docs.SEGelectronics.de/mca4-2>



For more information please contact:

© SEG Electronics GmbH  
[www.SEGelectronics.de](http://www.SEGelectronics.de)  
All Rights Reserved | 03/2022